

S = Standard Equipment A = Available -- (dashes) = Not Available D = ADI Available
 ■ = Included in Equipment Group □ = Included in Equipment Group but upgradeable

*Indicates availability of feature on multiple models. For example, it indicates feature availability on 2WD and 4WD Models or Rear wheel drive and All-wheel drive Models.

Codes listed in the shaded column titled Ref. Only RPO Code are for internal use only and should not be ordered.

Free Flow RPO Code	Ref. Only RPO Code	Description	Reg. Cab					Crew Cab	
			CT51003 109" WB 1WT	CT52003 132.5" WB 1WT	CT53003 150" WB 1WT	CT54003 176" WB 1WT	CT55003 200" WB 1WT	CT53043 150" WB 1WT	CT54043 176" WB 1WT
C60		Air conditioning , single-zone manual, integral in-dash mounted 1 - Must specify (C60) Air conditioning or (C42) heat only HVAC system.	A ¹	A ¹	A ¹	A ¹	S	A ¹	A ¹
	K34	Cruise control , electronic, automatic	S	S	S	S	S	S	S
		Cup holders	S	S	S	S	S	S	S
	UIY	Audio system , AM/FM stereo with CD player, auxiliary input and USB Port	S	S	S	S	S	S	S
	UAD	Audio system feature , 2 speakers	S	S	S	S	S	S	S
	AU3	Door locks , power	S	S	S	S	S	S	S
	UDH	Driver Information Center , (DIC) (monitors vital functions including diesel exhaust fluid levels (DEF), particulate matter emissions level in the diesel particulate filter (DPF), diesel particulate filter regeneration, service reminders for engine oil, transmission oil, differential oil, power steering fluid, engine oil filter, and fuel filters. The DIC provides fuel economy reporting by average, instant, and trip.)	S	S	S	S	S	S	S
		Floor mats	S	S	S	S	S	S	S
		Lighting , interior dome	S	S	S	S	S	S	S
	A1F	Seat , front high back bucket driver and passenger, tricort cloth covered reclining highback driver seat with single two occupant fold down passenger seat	S	S	S	S	S	S	S
	N3R	Steering wheel , urethane	S	S	S	S	S	S	S
	N33	Steering column , Tilt-Wheel	S	S	S	S	S	S	S
		Storage , door pockets	S	S	S	S	S	S	S
		Storage , seatback pockets	S	S	S	S	S	S	S
	A31	Windows , power	S	S	S	S	S	S	S
		Windshield washer bottle access , on passenger side dash when passenger-side door is open	S	S	S	S	S	S	S
		Daytime Running Lamps	S	S	S	S	S	S	S

Free Flow RPO Code	Ref. Only RPO Code	Description	Reg. Cab					Crew Cab	
			CT51003 109" WB 1WT	CT52003 132.5" WB 1WT	CT53003 150" WB 1WT	CT54003 176" WB 1WT	CT55003 200" WB 1WT	CT53043 150" WB 1WT	CT54043 176" WB 1WT
		Glass, tinted	S	S	S	S	S	S	S
	DB5	Mirror , outside driver and front passenger, wide load with integral arm	S	S	S	S	S	S	S
	E01	Assist steps	S	S	S	S	S	S	S
	2TB	Tires , front, 225/70R19.5 F 125/123 L BW HWY VAR1	S	S	S	S	S	S	S
	3TB	Tires , rear, 225/70R19.5 F 125/123 L BW HWY VAR1	S	S	S	S	S	S	S
	PWK	Wheels , 19.5" x 6", K steel	S	S	S	S	S	S	S
	CD7	Windshield wiper , pulse, wet arm	S	S	S	S	S	S	S
	RQ2	Vehicle Application Truck	S	S	S	S	S	S	S
	VXT	Incomplete vehicle certification	S	S	S	S	S	S	S
	K45	Air cleaner , heavy-duty, 11" diameter dry paper single element. Air cleaner canister standard with air restriction gauge. Back of cab location.	S	S	S	S	S	S	S
	TP7	Battery , dual 750 cold-cranking amps, 12 volt, maintenance free	S	S	S	S	S	S	S
	JE5	Brakes , 4-wheel antilock, front disc, rear drum, dual circuit, vacuum assisted hydraulic with EBD (Electronic Brake Distribution). Disc front and self-adjust outboard mounted drum rear. Mechanical, transmission-mounted parking brake. Non-asbestos semi-metallic linings are standard. 4 channel anti-lock brake system.	S	S	S	S	S	S	S
	J69	Brake , parking, cable actuated, internal expanding drum type, transmission-mounted	S	S	S	S	S	S	S
	I1B	Engine , Diesel 5.2L 4 cylinder, 215 hp [160.3 kW] @2500 rpm, 452 lb-ft of torque [612.8 Nm] @ 1850-2750 rpm (Governed). 16 valve, four cycle, chain-driven dual overhead camshaft valve train, a cast iron cylinder block, and a cast aluminum cylinder head. Turbocharged, inter-cooled, water cooled EGR, direct injection, electronically controlled common rail fuel system and engine cruise control. Oil level check switch and light. Engine warning system with audible warning for low oil pressure, high coolant temperature, and a protection system that will reduce fueling if excessive coolant temperature is detected	S	S	S	S	S	S	S

Free Flow RPO Code	Ref. Only RPO Code	Description	Reg. Cab					Crew Cab	
			CT51003 109" WB 1WT	CT52003 132.5" WB 1WT	CT53003 150" WB 1WT	CT54003 176" WB 1WT	CT55003 200" WB 1WT	CT53043 150" WB 1WT	CT54043 176" WB 1WT
	K40	Exhaust brake	S	S	S	S	S	S	S
	N4C	Emissions , 50 state certification	S	S	S	S	S	S	S
	NC2	Exhaust , single horizontal outlet	S	S	S	S	S	S	S
	NH2	Fuel tank , 30 Gallon, (113L), rectangular fuel tank. mounted between frame rail with electric type fuel pump (mounted in tank). Through the rail fuel fill	S	S	S	S	S	S	S
	KG9	Alternator , 140 amps	S	S	S	S	S	S	S
	C7X	GVWR , 17,950 lbs. (8142 kg)	S	S	S	S	S	S	S
	EB4	Wheelbase , 109" (276.9 cm)	S	--	--	--	--	--	--
	ED6	Wheelbase , 132.5" (336.6 cm)	--	S	--	--	--	--	--
	FWH	Wheelbase , 150" (381.0 cm)	--	--	S	--	--	S	--
	FNW	Wheelbase , 176" (447.0 cm)	--	--	--	S	--	--	S
	EM2	Wheelbase , 200" (508 cm) 1 - Only available with exterior color (16U) White.	--	--	--	--	S ¹	--	--
		Frame , ladder-type channel frame. Full C section straight frame 33.5" (85.1 cm) wide. Yield strength 44,000 psi, section modulus 7.20 cu.in. and RBM 316,800 lb-ft/in per rail.	S	S	S	S	S	--	--
		Frame , ladder-type channel frame. Full C section straight frame 33.5" (85.1 cm) wide. Yield strength 44,000 psi, section modulus 11.89 cu.in. and RBM 523,160 lb-ft/in per rail.	--	--	--	--	--	S	S
	FL5	Front axle , 6,830 lbs. (3098 kg), reverse Elliot "I"-beam includes integral hydraulic power steering. ratio 18.8-20.9:1	S	S	S	S	S	S	S
	FM2	Front suspension , 8,440 lbs. (3828 kg) tapered leaf	S	S	S	S	S	S	S
	HS9	Rear axle , 14,550 lbs. (6600 kg)	S	S	S	S	S	S	S
	FU6	Rear Suspension , 14,550 lbs. (6599 kg)	S	S	S	S	S	S	S
	062	Rear axle , 5.12 ratio	S	S	S	S	S	S	S
	IR7	Transmission , 6-speed automatic Aisin A465 transmission with fifth and sixth gear overdrive with lock up in 2nd, 3rd, 4th, 5th and 6th, PTO capability automatic torque converter lockup in stationary PTO mode.	S	S	S	S	S	S	S

2017 Chevrolet Truck 5500HD LCF INTERIOR Diesel

S = Standard Equipment A = Available -- (dashes) = Not Available D = ADI Available
 ■ = Included in Equipment Group □ = Included in Equipment Group but upgradeable

*Indicates availability of feature on multiple models. For example, it indicates feature availability on 2WD and 4WD Models or Rear wheel drive and All-wheel drive Models.

Codes listed in the shaded column titled Ref. Only RPO Code are for internal use only and should not be ordered.

Free Flow RPO Code	Ref. Only RPO Code	Description	Reg. Cab					Crew Cab	
			CT51003 109" WB 1WT	CT52003 132.5" WB 1WT	CT53003 150" WB 1WT	CT54003 176" WB 1WT	CT55003 200" WB 1WT	CT53043 150" WB 1WT	CT54043 176" WB 1WT
C60		Air conditioning , single-zone manual, integral in-dash mounted 1 - Must specify (C60) Air conditioning or (C42) heat only HVAC system.	A ¹	A ¹	A ¹	A ¹	S	A ¹	A ¹
C42		HVAC system , heater only 1 - Must specify (C60) Air conditioning or (C42) heat only HVAC system.	A ¹	A ¹	A ¹	A ¹	--	A ¹	A ¹
	K34	Cruise control , electronic, automatic	S	S	S	S	S	S	S
		Cup holders	S	S	S	S	S	S	S
	UIY	Audio system , AM/FM stereo with CD player, auxiliary input and USB Port	S	S	S	S	S	S	S
UIZ		PIO, Audio System , AM/FM stereo with CD player, auxiliary jack, USB port and Bluetooth, (Port Installed Option)	A	A	A	A	A	A	A
UL5		PIO, Audio System , radio delete, (Port Installed Option)	A	A	A	A	A	A	A
	UAD	Audio system feature , 2 speakers	S	S	S	S	S	S	S
	AU3	Door locks , power	S	S	S	S	S	S	S
	UDH	Driver Information Center , (DIC) (monitors vital functions including diesel exhaust fluid levels (DEF), particulate matter emissions level in the diesel particulate filter (DPF), diesel particulate filter regeneration, service reminders for engine oil, transmission oil, differential oil, power steering fluid, engine oil filter, and fuel filters. The DIC provides fuel economy reporting by average, instant, and trip.)	S	S	S	S	S	S	S
		Floor mats	S	S	S	S	S	S	S
MTE		PIO, Fire extinguisher and safety reflector mounting provisions , (Port Installed Option)	A	A	A	A	A	A	A
ATG		PIO, Remote Keyless Entry , (Port Installed Option)	A	A	A	A	A	A	A
		Lighting , interior dome	S	S	S	S	S	S	S
IX2		PIO, Rear dome and body lamp switch , (Port Installed Option)	A	A	A	A	A	A	A

2017 Chevrolet Truck 5500HD LCF INTERIOR Diesel

Free Flow RPO Code	Ref. Only RPO Code	Description	Reg. Cab					Crew Cab	
			CT51003 109" WB 1WT	CT52003 132.5" WB 1WT	CT53003 150" WB 1WT	CT54003 176" WB 1WT	CT55003 200" WB 1WT	CT53043 150" WB 1WT	CT54043 176" WB 1WT
	A1F	Seat , front high back bucket driver and passenger, tricort cloth covered reclining highback driver seat with single two occupant fold down passenger seat	S	S	S	S	S	S	S
A1G		PIO, Seat , high back driver only air suspension seat and fixed passenger seat, (Port Installed Option) 1 - Not available with (9W8) protective seat-cover.	A ¹	A ¹	A ¹	A ¹	A ¹	--	--
9W8		PIO, Seat-cover protector , (Port Installed Option) 1 - Not available with (A1G) high back driver air suspension seat.	A ¹	A ¹	A ¹	A ¹	A ¹	A	A
	N3R	Steering wheel , urethane	S	S	S	S	S	S	S
	N33	Steering column , Tilt-Wheel	S	S	S	S	S	S	S
		Storage , door pockets	S	S	S	S	S	S	S
		Storage , seatback pockets	S	S	S	S	S	S	S
	A31	Windows , power	S	S	S	S	S	S	S
		Windshield washer bottle access , on passenger side dash when passenger-side door is open	S	S	S	S	S	S	S

**2017 Chevrolet Truck 5500HD LCF EXTERIOR
Diesel**

S = Standard Equipment A = Available -- (dashes) = Not Available D = ADI Available
 ■ = Included in Equipment Group □ = Included in Equipment Group but upgradeable

*Indicates availability of feature on multiple models. For example, it indicates feature availability on 2WD and 4WD Models or Rear wheel drive and All-wheel drive Models.

Codes listed in the shaded column titled Ref. Only RPO Code are for internal use only and should not be ordered.

Free Flow RPO Code	Ref. Only RPO Code	Description	Reg. Cab					Crew Cab	
			CT51003 109" WB 1WT	CT52003 132.5" WB 1WT	CT53003 150" WB 1WT	CT54003 176" WB 1WT	CT55003 200" WB 1WT	CT53043 150" WB 1WT	CT54043 176" WB 1WT
		Daytime Running Lamps	S	S	S	S	S	S	S
		Glass, tinted	S	S	S	S	S	S	S
V22		PIO, Grille, chrome, (Port Installed Option)	A	A	A	A	A	A	A
	DB5	Mirror, outside driver and front passenger, wide load with integral arm	S	S	S	S	S	S	S
DB6		PIO, Mirror, outside driver and front passenger, wide load, heated, power-adjustable, lighted with integral arm, (Port Installed Option)	A	A	A	A	A	A	A
DB8		PIO, Mirror, outside driver and front passenger, wide load, heated with integral arm, (Port Installed Option)	A	A	A	A	A	A	A
XWL		PIO, Mirror, provisions-bracket for 102" wide body, (Port Installed Option)	A	A	A	A	A	A	A
UZF		PIO, Back up alarm, (Port Installed Option)	A	A	A	A	A	A	A
G7M		PIO, Roof-air deflector, (Port Installed Option)	A	A	A	A	A	--	--
PDI		NEW! Pre-Delivery Inspection, Provides "Pre-Delivery Inspection" at the Port in cases where the vehicle needs to leave the port directly for the final stage manufacturing process and will not visit a dealer.	A	A	A	A	A	A	A
	E01	Assist steps	S	S	S	S	S	S	S
	2TB	Tires, front, 225/70R19.5 F 125/123 L BW HWY VAR1	S	S	S	S	S	S	S
	3TB	Tires, rear, 225/70R19.5 F 125/123 L BW HWY VAR1	S	S	S	S	S	S	S
	PWK	Wheels, 19.5" x 6", K steel	S	S	S	S	S	S	S
	CD7	Windshield wiper, pulse, wet arm	S	S	S	S	S	S	S

S = Standard Equipment A = Available -- (dashes) = Not Available D = ADI Available
 ■ = Included in Equipment Group □ = Included in Equipment Group but upgradeable

*Indicates availability of feature on multiple models. For example, it indicates feature availability on 2WD and 4WD Models or Rear wheel drive and All-wheel drive Models.

Codes listed in the shaded column titled Ref. Only RPO Code are for internal use only and should not be ordered.

Free Flow RPO Code	Ref. Only RPO Code	Description	Reg. Cab					Crew Cab	
			CT51003 109" WB 1WT	CT52003 132.5" WB 1WT	CT53003 150" WB 1WT	CT54003 176" WB 1WT	CT55003 200" WB 1WT	CT53043 150" WB 1WT	CT54043 176" WB 1WT
	RQ2	Vehicle Application Truck	S	S	S	S	S	S	S
	VXT	Incomplete vehicle certification	S	S	S	S	S	S	S
	K45	Air cleaner , heavy-duty, 11" diameter dry paper single element. Air cleaner canister standard with air restriction gauge. Back of cab location.	S	S	S	S	S	S	S
	TP7	Battery , dual 750 cold-cranking amps, 12 volt, maintenance free	S	S	S	S	S	S	S
	JE5	Brakes , 4-wheel antilock, front disc, rear drum, dual circuit, vacuum assisted hydraulic with EBD (Electronic Brake Distribution). Disc front and self-adjust outboard mounted drum rear. Mechanical, transmission-mounted parking brake. Non-asbestos semi-metallic linings are standard. 4 channel anti-lock brake system.	S	S	S	S	S	S	S
	J69	Brake , parking, cable actuated, internal expanding drum type, transmission-mounted	S	S	S	S	S	S	S
	I1B	Engine , Diesel 5.2L 4 cylinder, 215 hp [160.3 kW] @2500 rpm, 452 lb-ft of torque [612.8 Nm] @ 1850-2750 rpm (Governed). 16 valve, four cycle, chain-driven dual overhead camshaft valve train, a cast iron cylinder block, and a cast aluminum cylinder head. Turbocharged, inter-cooled, water cooled EGR, direct injection, electronically controlled common rail fuel system and engine cruise control. Oil level check switch and light. Engine warning system with audible warning for low oil pressure, high coolant temperature, and a protection system that will reduce fueling if excessive coolant temperature is detected	S	S	S	S	S	S	S
K05		NEW! PIO, Engine block heater , (Port Installed Option)	A	A	A	A	A	A	A
	K40	Exhaust brake	S	S	S	S	S	S	S

Free Flow RPO Code	Ref. Only RPO Code	Description	Reg. Cab					Crew Cab	
			CT51003 109" WB 1WT	CT52003 132.5" WB 1WT	CT53003 150" WB 1WT	CT54003 176" WB 1WT	CT55003 200" WB 1WT	CT53043 150" WB 1WT	CT54043 176" WB 1WT
KPJ		PIO, Engine shutdown-automatic , hot water temperature, low water level and low oil pressure triggered, (Port Installed Option)	A	A	A	A	A	A	A
KQJ		PIO, Engine shutdown-automatic 3 minute timer , timer set for 3 minutes for engine shutdown, (Port Installed Option) 1 - Not available with (KQN) engine shutdown 5-minute timer.	A ¹	A ¹	A ¹	A ¹	A ¹	A ¹	A ¹
KQN		PIO, Engine shutdown-automatic 5 minute timer , timer set at 5 minutes for engine shutdown, (Port Installed Option) 1 - Not available with (KQJ) engine shutdown 3-minute timer.	A ¹	A ¹	A ¹	A ¹	A ¹	A ¹	A ¹
	N4C	Emissions , 50 state certification	S	S	S	S	S	S	S
	NC2	Exhaust , single horizontal outlet	S	S	S	S	S	S	S
NPV		PIO, Exhaust , single vertical with DPF, (Port Installed Option)	A	A	A	A	A	--	--
	NH2	Fuel tank , 30 Gallon, (113L), rectangular fuel tank. mounted between frame rail with electric type fuel pump (mounted in tank). Through the rail fuel fill	S	S	S	S	S	S	S
NL7		NEW! Fuel tank , 133 Gallon, (125L), Cylindrical fuel tank. Outside mounted on right hand frame rail. Fuel water separator with dash mounted warning light	--	--	--	A	--	--	--
NLX		PIO, Fuel tank , additional 33 gallons (125L), driver-side mounted, (Port Installed Option)	--	--	A	A	--	--	A
KPG		PIO, Lockable fuel cap , def fuel fill, (Port Installed Option)	A	A	A	A	A	A	A
	KG9	Alternator , 140 amps	S	S	S	S	S	S	S
9C2		PIO, Governor , speed limited to 65-mph, (Port Installed Option)	A	A	A	A	A	A	A
9D2		PIO, Governor , speed limited to 58-mph, (Port Installed Option)	A	A	A	A	A	A	A
9E2		PIO, Governor , speed limited to 68-mph, (Port Installed Option)	A	A	A	A	A	A	A
9B9		PIO, Governor , speed limited to 70-mph, (Port Installed Option)	A	A	A	A	A	A	A
	C7X	GVWR , 17,950 lbs. (8142 kg)	S	S	S	S	S	S	S
	EB4	Wheelbase , 109" (276.9 cm)	S	--	--	--	--	--	--
	ED6	Wheelbase , 132.5" (336.6 cm)	--	S	--	--	--	--	--

Free Flow RPO Code	Ref. Only RPO Code	Description	Reg. Cab					Crew Cab	
			CT51003 109" WB 1WT	CT52003 132.5" WB 1WT	CT53003 150" WB 1WT	CT54003 176" WB 1WT	CT55003 200" WB 1WT	CT53043 150" WB 1WT	CT54043 176" WB 1WT
	FWH	Wheelbase, 150" (381.0 cm)	--	--	S	--	--	S	--
	FNW	Wheelbase, 176" (447.0 cm)	--	--	--	S	--	--	S
	EM2	Wheelbase, 200" (508 cm) 1 - Only available with exterior color (16U) White.	--	--	--	--	S ¹	--	--
		Frame , ladder-type channel frame. Full C section straight frame 33.5" (85.1 cm) wide. Yield strength 44,000 psi, section modulus 7.20 cu.in. and RBM 316,800 lb-ft/in per rail.	S	S	S	S	S	--	--
		Frame , ladder-type channel frame. Full C section straight frame 33.5" (85.1 cm) wide. Yield strength 44,000 psi, section modulus 11.89 cu.in. and RBM 523,160 lb-ft/in per rail.	--	--	--	--	--	S	S
KPK		PIO, Heater , oil pan, (Port Installed Option)	A	A	A	A	A	A	A
	FL5	Front axle , 6,830 lbs. (3098 kg), reverse Elliot "I"-beam includes integral hydraulic power steering. ratio 18.8-20.9:1	S	S	S	S	S	S	S
	FM2	Front suspension , 8,440 lbs. (3828 kg) tapered leaf	S	S	S	S	S	S	S
	HS9	Rear axle , 14,550 lbs. (6600 kg)	S	S	S	S	S	S	S
	FU6	Rear Suspension , 14,550 lbs. (6599 kg)	S	S	S	S	S	S	S
G86		Axle , limited slip	A	A	A	A	--	A	A
	062	Rear axle , 5.12 ratio	S	S	S	S	S	S	S
PTO		Power Take Off , engine control provisions	A	A	A	A	A	A	A
	IR7	Transmission , 6-speed automatic Aisin A465 transmission with fifth and sixth gear overdrive with lock up in 2nd, 3rd, 4th, 5th and 6th, PTO capability automatic torque converter lockup in stationary PTO mode.	S	S	S	S	S	S	S

S = Standard Equipment A = Available -- (dashes) = Not Available
 ■ = Included in Equipment Group □ = Included in Equipment Group but upgradeable

*Indicates availability of feature on multiple models. For example, it indicates feature availability on 2WD and 4WD Models or Rear wheel drive and All-wheel drive Models.

Decor Level	Seat Type	Seat Code	Seat Trim	Interior
				Very Dark Pewter
1WT	High back bucket seat	A1F	Cloth	HNF
1WT	High back bucket air suspension seat	A1G	Cloth	HNF

Exterior Solid Paint	Color Code	Touch Up Paint Number	Interior
			Very Dark Pewter
Arc White	16U	WA-none	A
Ebony Black ¹	41U	WA-none	A
Woodland Green ¹	46U	WA-none	A
Dark Blue ¹	47U	WA-none	A
Cardinal Red ¹	74U	WA-none	A
Wheatland Yellow ¹	86U	WA-none	A

1 - Requires (C60) Air conditioning. Not available with (EM2) 200" wheelbase. Adds a lead time of 16 weeks.

2017 Chevrolet Truck 5500HD LCF Diesel DIMENSIONS - Regular Cab

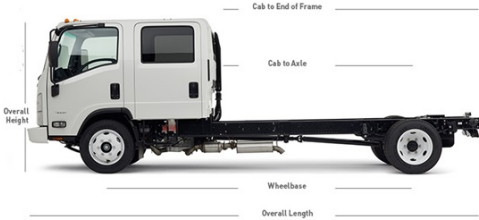
All dimensions in inches (mm) unless otherwise stated.

	Specifications	CT51003	CT52003	CT53003	CT54003	CT55003	
		17,950 lb. GVWR Diesel 109" Wheelbase Regular Cab	17,950 lb. GVWR Diesel 132.5" Wheelbase Regular Cab	17,950 lb. GVWR Diesel 150" Wheelbase Regular Cab	17,950 lb. GVWR Diesel 176" Wheelbase Regular Cab	17,950 lb. GVWR Diesel 200" Wheelbase Regular Cab	
	A	Wheelbase	109.00 (2769)	132.50 (3366)	150.00 (3810)	176.00 (4470)	200.00 (5080)
	B	Overall length	200.50 (5093)	224.00 (5690)	241.50 (6134)	267.50 (6794)	291.50 (7404)
		Overall width	81.30 (2065)	81.30 (2065)	81.30 (2065)	81.30 (2065)	81.30 (2065)
	D	Overall height	92.40 (2347)	92.40 (2347)	92.40 (2347)	92.40 (2347)	92.40 (2347)
		Rear track width	65.60 (1666)	65.60 (1666)	65.60 (1666)	65.60 (1666)	65.60 (1666)
	CA	Cab to axle	86.50 (2197)	110.00 (2794)	127.50 (3238)	153.50 (3899)	177.50 (4508)
		Cab to end of frame	129.60 (3292)	153.10 (3889)	170.60 (4333)	196.60 (4994)	220.60 (5603)
		Frame width, rear	33.50 (851)	33.50 (851)	33.50 (851)	33.50 (851)	33.50 (851)

Published dimensions indicated are without optional equipment or accessories. Additional accessories or equipment ordered at the customer's request can result in a minor change in these dimensions.

2017 Chevrolet Truck 5500HD LCF Diesel DIMENSIONS - Crew Cab

All dimensions in inches (mm) unless otherwise stated.

	Specifications		CT53043	CT54043
			17,950 lb. GVWR Diesel 150" Wheelbase Crew Cab	17,950 lb. GVWR Diesel 176" Wheelbase Crew Cab
	A	Wheelbase	150.00 (3810)	176.00 (4470)
	B	Overall length	241.50 (6134)	267.50 (6794)
		Overall width	81.30 (2065)	81.30 (2065)
	D	Overall height	92.40 (2347)	92.40 (2347)
		Rear track width	65.60 (1666)	65.60 (1666)
	CA	Cab to axle	88.50 (2248)	114.50 (2908)
		Cab to end of frame	131.60 (3343)	157.60 (4003)
		Frame width, rear	33.50 (851)	33.50 (851)

Published dimensions indicated are without optional equipment or accessories. Additional accessories or equipment ordered at the customer's request can result in a minor change in these dimensions.

2017 Chevrolet Truck 5500HD LCF Diesel SPECS - Regular Cab

	CT51003 17,950 lb. GVWR Diesel 109" Wheelbase Regular Cab	CT52003 17,950 lb. GVWR Diesel 132.5" Wheelbase Regular Cab	CT53003 17,950 lb. GVWR Diesel 150" Wheelbase Regular Cab	CT54003 17,950 lb. GVWR Diesel 176" Wheelbase Regular Cab	CT55003 17,950 lb. GVWR Diesel 200" Wheelbase Regular Cab
Specifications					
Frame Material Strength (psi)	44000	44000	44000	44000	44000
Frame Section Modulus (in ²)	7.20	7.20	7.20	7.20	7.20
Frame RBM (lb-ft/in)	316800	316800	316800	316800	316800
Body length available (ft.)	10-12	14	16-18	20	22
Capacities					
Payload ¹ , lbs. (kg)	8339 (3783)	8339 (3783)	8339 (3783)	8339 (3783)	8339 (3783)
Gross Combination Maximum Rating (GCMR), lbs. (kg)	23950 (10864)	23950 (10864)	23950 (10864)	23950 (10864)	23950 (10864)
Gross Vehicle Weight Rating, lbs. (kg)	17950 (8142)	17950 (8142)	17950 (8142)	17950 (8142)	17950 (8142)
Fuel capacity, Imperial, gallon (liters)	30.0 (136)	30.0 (136)	30.0 (136)	30.0 (136)	30.0 (136)
1. Maximum payload capacity includes weight of driver, passengers, optional equipment and cargo.					

2017 Chevrolet Truck 5500HD LCF Diesel SPECS - Crew Cab

	CT53043 17,950 lb. GVWR Diesel 150" Wheelbase Crew Cab	CT54043 17,950 lb. GVWR Diesel 176" Wheelbase Crew Cab
Specifications		
Frame Material Strength (psi)	44000	44000
Frame Section Modulus (in ²)	11.89	11.89
Frame RBM (lb-ft/in)	523160	523160
Body length available (ft.)	12	14
Capacities		
Payload ² , lbs. (kg)	7766 (3523)	7766 (3523)
Gross Combination Maximum Rating (GCMR), lbs. (kg)	23950 (10864)	23950 (10864)
Gross Vehicle Weight Rating, lbs. (kg)	17950 (8142)	17950 (8142)
Fuel capacity, Imperial, gallon (liters)	30.0 (136)	30.0 (136)
2. Maximum payload capacity includes weight of driver, passengers, optional equipment and cargo.		

2017 Chevrolet Truck 5500HD LCF Diesel RPO CODES

Option Code	Description
IX2	PIO, Rear dome and body lamp switch
062	Rear axle, 5.12 ratio
2TB	Tires, front, 225/70R19.5 F 125/123 L BW HWY VAR1
3TB	Tires, rear, 225/70R19.5 F 125/123 L BW HWY VAR1
9B9	PIO, Governor, speed limited to 70-mph
9C2	PIO, Governor, speed limited to 65-mph
9D2	PIO, Governor, speed limited to 58-mph
9E2	PIO, Governor, speed limited to 68-mph
9W8	PIO, Seat-cover protector
A1F	Seat, front high back bucket driver and passenger
A1G	PIO, Seat, high back driver only air suspension seat and fixed passenger seat
A31	Windows, power
ATG	PIO, Remote Keyless Entry
AU3	Door locks, power
C42	HVAC system, heater only
C60	Air conditioning, single-zone manual
C7X	GVWR, 17,950 lbs. (8142 kg)
CD7	Windshield wiper, pulse, wet arm
DB5	Mirror, outside driver and front passenger, wide load with integral arm
DB6	PIO, Mirror, outside driver and front passenger, wide load, heated, power-adjustable, lighted with integral arm
DB8	PIO, Mirror, outside driver and front passenger, wide load, heated with integral arm
E01	Assist steps
EB4	Wheelbase, 109" (276.9 cm)
ED6	Wheelbase, 132.5" (336.6 cm)
EM2	Wheelbase, 200" (508 cm)
FL5	Front axle, 6,830 lbs. (3098 kg)
FM2	Front suspension, 8,440 lbs. (3828 kg) tapered leaf
FNW	Wheelbase, 176" (447.0 cm)
FU6	Rear Suspension, 14,550 lbs. (6599 kg)
FWH	Wheelbase, 150" (381.0 cm)
G7M	PIO, Roof-air deflector
G86	Axle, limited slip
HS9	Rear axle, 14,550 lbs. (6600 kg)
I1B	Engine, Diesel 5.2L 4 cylinder
IR7	Transmission, 6-speed automatic Aisin A465 transmission with fifth and sixth gear overdrive with lock up in 2nd, 3rd, 4th, 5th and 6th, PTO capability automatic torque converter lockup in stationary PTO mode.
J69	Brake, parking
JE5	Brakes, 4-wheel antilock, front disc, rear drum
K05	PIO, Engine block heater
K34	Cruise control
K40	Exhaust brake
K45	Air cleaner, heavy-duty
KG9	Alternator, 140 amps
KPG	PIO, Lockable fuel cap, def fuel fill
KPJ	PIO, Engine shutdown-automatic, hot water temperature, low water level and low oil pressure triggered
KPK	PIO, Heater, oil pan

2017 Chevrolet Truck 5500HD LCF Diesel RPO CODES

Option Code	Description
KQJ	PIO, Engine shutdown-automatic 3 minute timer, timer set for 3 minutes for engine shutdown
KQN	PIO, Engine shutdown-automatic 5 minute timer, timer set at 5 minutes for engine shutdown
MTE	PIO, Fire extinguisher and safety reflector mounting provisions
N33	Steering column, Tilt-Wheel
N3R	Steering wheel, urethane
N4C	Emissions, 50 state certification
NC2	Exhaust, single horizontal outlet
NH2	Fuel tank, 30 Gallon, (113L)
NL7	Fuel tank, 133 Gallon, (125L), Cylindrical fuel tank. Outside mounted on right hand frame rail. Fuel water separator with dash mounted warning light
NLX	PIO, Fuel tank, additional 33 gallons (125L), driver-side mounted
NPV	PIO, Exhaust, single vertical with DPF
PDI	Pre-Delivery Inspection, Provides "Pre-Delivery Inspection" at the Port in cases where the vehicle needs to leave the port directly for the final stage manufacturing process and will not visit a dealer.
PTO	Power Take Off, engine control provisions
PWK	Wheels, 19.5" x 6", K steel
RQ2	Vehicle Application Truck
TP7	Battery, dual 750 cold-cranking amps, 12 volt, maintenance free
UAD	Audio system feature, 2 speakers
UDH	Driver Information Center
UIY	Audio system, AM/FM stereo with CD player
UIZ	PIO, Audio System, AM/FM stereo with CD player
UL5	PIO, Audio System, radio delete
UZF	PIO, Back up alarm
V22	PIO, Grille, chrome
VXT	Incomplete vehicle certification
XWL	PIO, Mirror, provisions-bracket for 102" wide body

Updates for 5500HD LCF Diesel

Week of 5/9/2016

Effective 5/9/2016, the following changes will be made to the Vehicle Order Guide:

- Exterior section-Added (PDI) Pre-Delivery Inspection, Provides "Pre-Delivery Inspection" at the Port in cases where the vehicle needs to leave the port directly for the final stage manufacturing process and will not visit a dealer. This option has "A" availability on all trims.
- Mechanical section-Added (NL7) Fuel tank, 133 Gallon, (125L), Cylindrical fuel tank. Outside mounted on right hand frame rail. Fuel water separator with dash mounted warning light with "A" availability on CT54003 176 " wheelbase model only.
- Mechanical section-Added (K05) PIO, Engine block heater, (Port Installed Option) with "A" available on all models and wheelbases.

Week of 4/25/2016

Effective 4/25/2016, the following changes will be made to the Vehicle Order Guide:

- Mechanical section-(NLX) PIO, Fuel tank, changed availability on CT55003 200" WB 1WT to "-".
- Mechanical section-(G86) Axle, limited slip, changed availability on CT55003 200" WB 1WT to "-".

Week of 4/18/2016

Effective 4/18/2016, the following changes will be made to the Vehicle Order Guide:

- Mechanical section-(ED6) Wheelbase, 132" (335.3 cm), updated extended description to read "132.5" (336.6)".

Week of 4/11/2016

Effective 4/11/2016, the following changes will be made to the Vehicle Order Guide:

- Color and Trim section-(16U) White, changed name to "Arc White".
- Color and Trim section-(41U) Black, changed name to "Ebony Black".
- Color and Trim section-(46U) Dark Green, changed name to "Woodland Green".